

BRETFORD BASICS™

CONNECTIONS XTC WORK CENTERS

The Connections XTC Work Centers include a CPU Harness that attaches to the underside of the table. Each table is height adjustable to accommodate most adult users. Tops are finished in grey laminate with trim available in four different colors. Bases are constructed of steel and finished in grey powder paint. Select from glides or casters to meet your application.



FEATURES

- CPU tower holder adds extra work space by mounting the CPU tower under the work surface, up and out of the way. Standard CPU holder is adjustable from 6-1/2" to 11-1/4" w and slim CPU holder is adjustable from 3-1/2" to 5-3/4" w. Both measure 18-7/8" d x 20-3/8" h. 72" W models feature two CPU tower holders, all other tables come with one.
- Attractive Grey 1" laminate tabletop, 45 lb. density furniture board subtrait, trimmed with 3mm T-mold edge band attached along the entire perimeter of the top. Edge band in your choice of four trim colors, Quartz grey, Cardinal red, Polo green, or Topaz blue. Also available to special order in any Bretford paint, trim and laminate offered.
- Tops feature metal threaded inserts on the underside to attach the leg assemblies to for a metal to metal connection that adds strength and greatly reduces the possibility screws will strip or fall out over time.
- Large work surface neatly holds one computer (2 computers on the 72" W units).
- 14-gauge sturdy steel base is constructed with an average 30% post-consumer recycled steel and features a unique "Y" shape design. Cord management bin with flip down door and grommet holes hide and organize electrical cords.
- Complies with the GREENGUARD Environmental Institute's GREENGUARD Children & Schools Indoor Air Quality standards, contributing to points toward Leadership in Energy and Environmental Design (LEED) Certification.
- Tables come with either leveling glides for stationary installations or 4" casters for interactive use.
- All tables have a height adjustable work surface from 24" to 32" (1" increments) for use by children or adults and provide 19" of knee depth from the front edge to the cord bin. See page two for widths between legs with and without the adjustable CPU holder.
- 36" w tables meet ADA requirements without the CPU holder installed, 42" w tables meet ADA requirements with the CPU holder set up to 7" wide, and 48" w tables meet ADA requirements with the CPU holder set at any width.
- The base mounts to the top using metal inserts and truss screws coated with lock tight for a strong and secure attachment. The metal insert prevents the screw from stripping the top if over tightened and the lock tight prevents screws from backing out once installed.
- Options include a 6-outlet electrical unit (ECF6), Juice Power System, and PowerBar cord management with hardwired electrical assembly.


A HIGHER FORM OF FUNCTION



BRETFORD

STANDARD COLOR/FINISH

Base/Tabletops: Grey powder paint/Grey laminate
Trim, Toe Caps & Grommet Holes: Available in Cardinal (GMC),
Topaz (GMT), Polo (GML) and Quartz (GMQ)

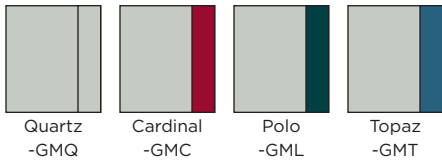

PREMIUM COLOR/FINISH OPTIONS

Connections tables may be special ordered in any of Bretford's premium finish offerings. For a complete listing of premium finishes please visit us on the web at www.bretford.com.

TABLE ACCESSORIES

3573-GM	Connections Bridge Pack
UCSKD-GM	Keyboard Drawer <i>(Note: UCSKD will not fit on 36"W tables and only on 42"W and 72"W tables when the CPU is less than 8 1/2" wide)</i>
UCSKDMP2-GM	Keyboard Drawer w/Mouse Extension <i>(Note: UCSKDMP will not fit on 36"W tables and only on 42"W and 72"W tables when the CPU is less than 8 1/2" wide)</i>
TGCPU-GM	Locking CPU Holder <i>(replaces existing holder)</i>

SOFTWARED POWER OPTION

ECF6 6-Outlet Power Strip *(1 each table)*

JUICE SOFTWARE POWER SYSTEM OPTION

DPCF4	Juice 4-Outlet Power Strip <i>(1 each table)</i>
DPP120	Juice Power In-Feed Cable <i>(1 each row)</i>
DPJ38	Juice Power Jumper Cable 38"L <i>(36"w to 36"w tables)</i>
DPJ42	Juice Power Jumper Cable 42"L <i>(42"w to 42"w tables)</i>
DPJ54	Juice Power Jumper Cable 54"L <i>(48"w to 42"w and 48"w and 36"w to 72"w tables)</i>
DPJ62	Juice Power Jumper Cable 62"L <i>(48"w to 72"w tables)</i>
DPJ74	Juice Power Jumper Cable 74"L <i>(72"w to 72"w tables)</i>

HARDWARE POWER SYSTEM OPTION

35PBR42-GM	PowerBar Raceway, 42" Table
35PBH42	Power Harness, 42" Table <i>(holds 2 Duplex)</i>
35PBR48-GM	PowerBar Raceway, 48" Table
35PBH48	Power Harness, 48" Table <i>(holds 2 Duplex)</i>
35PBR72-GM	PowerBar Raceway, 72" Table
35PBH72	Power Harness, 72" Table <i>(holds 2 Duplex)</i>
DUPLC_	Duplex Circuit 1, 2, 3 or 4 <i>(2 each table)</i>
JPCPT30	Jumper Cable, Any Size Table
JHDES	Power Entry Cable <i>(1 each row)</i>
35PBRCAP-GM	Pair Raceway End Caps, <i>(1 each row)</i>
35PBFD-GM	Raceway Wire Chase <i>(leads cable to floor)</i>
35PBDCLP-GM	Raceway Data Clip <i>(data jacks not included)</i>

MEETS ADA REQUIREMENTS

All Connections XTC Work Center tables meet ADA requirements when a CPU holder is not used. ADA requires 30" between the leg and CPU holder so the CPU size may impact the table's ability to meet the requirements, check your CPU width before purchase. The 48" and 72" tables meet ADA requirements with any size of CPU.

MADE IN THE USA

All Connections series tables are made at one of Bretford's Chicago area manufacturing facilities using union labor.

SUGGESTED SPECIFICATIONS

Tables height adjust from 24-32" in 1" increments. Table width is 36", 42", 48" or 72" depending on the model. Top is constructed with Grey Mist laminate on 1" furniture board, 45 pound density. Metal threaded inserts are installed in the underside of each top so the base attaches with a metal to metal connection. The modesty panel and cord management bin are made from 20-gauge steel. Cord management bin measures 4"h x 5-3/8"d and runs the width of the table. One side is hinged to the back of the modesty, the other side closes with a thumb screw (included), attaching to the bottom of the work surface. On 36" and 42" wide tables there is one grommet hole measuring 1-1/2" x 4" centered on the work surface. The 48" wide table has two grommet holes located 24" apart and the 72" wide tables have two grommet holes located 30" apart. Top upright of leg assembly constructed from 1-1/4" x 2" 14-gauge steel tube. Bottom upright and bar of base constructed from 1" x 1-3/4" 14-gauge steel tube. The "Y" shape of leg constructed from 1" square 18-gauge steel tube welded to 14-gauge steel top support. CPU Harness is constructed from steel and mounts under the table work surface. All models come with one CPU Harness except the 72"w models which come with two. Standard CPU holder adjusts 6-1/2" to 11-1/4"w and slim CPU holder adjusts 3-1/2" to 5-3/4"w. Both are 18-7/8"d x 20-3/8"h. GREENGUARD INDOOR AIR QUALITY CERTIFIED®. All steel parts are constructed with "prime" steel which has a 25% to 35% post-consumer recycled content and finished in an environmentally friendly Grey Mist powder paint. Ship ready to assemble in multiple carton packs.



ECF6 Power Strip



Juice Power System



PowerBar Hardwired System

OVERALL DIMENSIONS

UNITS WITH 4" CASTERS

35XTC17 & 35XTC17MT: 36"w x 30"d x 24-32"h

Leg Room: 31" between legs (*no CPU holder*)
18^{3/4"} to 24^{1/2"} between legs (*1 standard CPU holder*)
27^{1/2"} to 25^{1/4"} between legs (*1 slim CPU holder*)

35XTC14 & 35XTC14MT: 42"w x 30"d x 24-32"h

Leg Room: 37" between legs (*no CPU holder*)
24^{3/4"} to 30^{1/2"} between legs (*1 standard CPU holder*)
33^{1/2"} to 31^{1/4"} between legs (*1 slim CPU holder*)

35XTC18 & 35XTC18MT: 48"w x 30"d x 24-32"h

Leg Room: 43" between legs (*no CPU holder*)
30^{3/4"} to 36^{1/2"} between legs (*1 standard CPU holders*)
39^{1/2"} to 37^{1/4"} between legs (*1 slim CPU holder*)

35XTC26 & 35XTC26MT: 72"w x 30"d x 24-32"h

Leg Room: 67" between legs (*no CPU holders*)
42^{1/2"} to 54" between legs (*2 standard CPU holders*)
60" to 55^{1/2"} between legs (*2 slim CPU holders*)

UNITS WITH LEVELING GLIDES

35XTC21 & 35XTC21MT: 36"w x 30"d x 24-32"h

Leg Room: 31" between legs (*no CPU holder*)
18^{3/4"} to 24^{1/2"} between legs (*1 standard CPU holder*)
27^{1/2"} to 25^{1/4"} between legs (*1 slim CPU holder*)

35XTC15 & 35XTC15MT: 42"w x 30"d x 24-32"h

Leg Room: 37" between legs (*no CPU holder*)
24^{3/4"} to 30^{1/2"} between legs (*1 standard CPU holder*)
33^{1/2"} to 31^{1/4"} between legs (*1 slim CPU holder*)

35XTC23 & 35XTC23MT: 48"w x 30"d x 24-32"h

Leg Room: 43" between legs (*no CPU holder*)
30^{3/4"} to 36^{1/2"} between legs (*1 standard CPU holder*)
39-1/2" to 37-1/4" between legs (*1 slim CPU holder*)

35XTC25 & 35XTC25MT: 72"w x 30"d x 24-32"h

Leg Room: 67" between legs (*no CPU holders*)
42^{1/2"} to 54" between legs (*2 standard CPU holders*)
60" to 55^{1/2"} between legs (*2 slim CPU holders*)

STANDARD EQUIPMENT

Table top (1)

Right leg assembly (1)

Left leg assembly (1)

Cord management bin (1)

Modesty panel (1)

CPU Harness (1); 72"w unit (2)

Adjustable floor glides (4) or 4" casters (4), (2) lock

CARTON DIMENSIONS, WEIGHT & FREIGHT

35XTC21 & 35XTC21MT:

38-3/4"l x 33-1/2"w x 6-1/4"d

72 pounds, Freight class 70 UPS or LTL

35XTC17 & 35XTC17MT:

38-3/4"l x 33-1/2"w x 6-1/4"d

74 pounds, Freight class 70 UPS or LTL

35XTC15 & 35XTC15MT:

45-1/2"l x 33-1/2"w x 6-1/4"d

94 pounds, Freight class 70 UPS or LTL

35XTC14 & 35XTC14MT:

45-1/2"l x 33-1/2"w x 6-1/4"d

96 pounds, Freight class 70 UPS or LTL

35XTC23 & 35XTC23MT:

51"l x 33-1/2"w x 6-1/4"d

95 pounds, Freight class 70 LTL

35XTC18 & 35XTC18MT:

51"l x 33-1/2"w x 6-1/4"d

98 pounds, Freight class 70 LTL

35XTC25 & 35XTC25MT:

74-1/2"l x 33-1/2"w x 6-1/4"d

128 pounds, Freight class 70 LTL

35XTC26 & 35XTC26MT:

74-1/2"l x 33-1/2"w x 6-1/4"d

130 pounds, Freight class 70 LTL

All ship ready to assemble in one carton.



BRETFORD

11000 SEYMOUR AVENUE
FRANKLIN PARK, ILLINOIS 60131 USA
TOLL FREE PHONE 800-521-9614
PHONE 847-678-2545
TOLL FREE FAX 800-343-1779
FAX 847-678-0852
WWW.BRETFORD.COM